

HEAVYPRO



telaio in acciaio verniciato
painted steel frame



porta accessori
built-in accessories holder

battistrada in gomma
rubber wheels




Caratteristiche Generali

- Carrello robusto in metallo a due ruote completo di manico ed avvolgitubo in pressione
- Pompa a 3 pistoni in ceramica, con sistema biella-manovella
- Valvola di by-pass automatica con azzeramento della pressione nella testa della pompa
- Motore elettrico a induzione trifase con protezione termica
- Regolazione della pressione
- Manometro
- Valvola di regolazione flangiata (VR)
- Aspirazione detergente
- Tubo rinforzato con treccia in acciaio (10 m)
- Funzione autoadescante
- Pistola con swivel

General Features

- Heavy-duty two wheeled trolley with handle and in-pressure hose reel
- Triplex pump with ceramic pistons and connecting rod system
- Automatic by-pass valve with pressure with pump head pressure discharge
- Three-phase induction motor with thermal protector
- Pressure adjustment
- Pressure gauge
- Flanged pressure unloader (VR)
- Detergent injector
- Steel braided hose (10 m)
- Self-priming function
- Gun with swivel

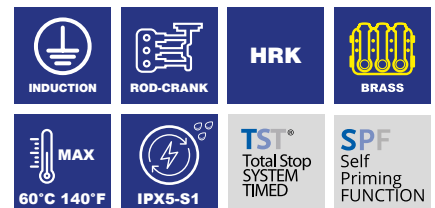

MOD	COD	 MAX				 MAX								 KG NET
		bar max	bar work	psi max	psi work	l/h work	gph work	hp	kW	kW work	rpm	Hz	V	kg
1009	15590	230	200	3335	2900	1260	333	9,6	7	9,3	1450	50	400 3~	57
1009 RLW*	15354-V	230	200	3335	2900	1260	333	9,6	7	9,3	1450	50	400 3~	60,7

*A richiesta / On request

Accessori standard / Standard accessories



codice / code	47209	46221 (56 cm)	3961050 (10 m) (1009) 3600970 (15 m) (1009 RLW)	3090 (2507)
entrata inlet	M22x1,5 M 14 mm	M22x1,5 M	M22x1,5 F	1/4 NPT M
uscita outlet	M22x1,5 F	1/4 NPT F	M22x1,5 F	-