POWER PACK 1500

PN. 078697



12 V/230 V

The POWER PACK 1500 is a portable power station combining a Lithium-Ion (LiFePO4) battery and a Pure Sine Wave (PSW) inverter. Ideal for recharging or powering all types of electronic appliances (1,000 W of continuous power, 2,000 W at its peak), it provides a 12 V DC voltage as well as an AC power supply of 230 V. Its large storage capacity allows it to keep most electrical appliances charged or running under any circumstances. It also acts as a booster pack for 12 V vehicles.

A MULTI-APPLICATION, PORTABLE POWER SUPPLY

The POWER PACK 1500 can be used anywhere that requires an independent power source:


- on isolated sites, far away from any electrical systems.
- on location: camping, recreational vehicles, recreational boating and fishing, DIY pursuits and outdoor leisure activities.

Its power and self-efficiency are particularly useful on construction sites to power and recharge portable power tools, lamps and other equipment for professionals and hobbyists working over multiple sites.



ADVANCED AND PROTECTED CONNECTIVITY

• It can be recharged in three different ways to ensure that the device is always ready for use: using a 230 V charger, a 12 V DC car charger or using solar panels (200 W max.).

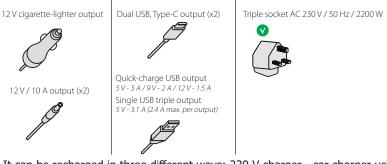

- It can be recharged in three different ways: 230 V charger car charger using a DC, 12 V input solar panel (1 or 2 identical panels of 100W max) to ensure that the station is always ready for use.
- It is protected against short circuits, overcurrents, overvoltage, undervoltage, overloading and overheating.

A BOOSTER FOR 12 V VEHICLES

The POWER PACK 1500 has a 'Booster' option to start vehicles with discharged, 12 V batteries (liquid, gel, AGM and stop-start batteries) in only a few seconds (*starting current: 500 A*).



DESIGNED FOR PRACTICAL, OUTDOOR USE

- Compact device featuring a sturdy handle for easy transportation.
- Fitted with an LED light offering five separate lighting modes (low, medium, high, SOS and flash).
- LCD display light indicates:
- the internal battery's state of charge
- any malfunctions



Charging indicators



Supplied with: accessories







230 V charger unit and mains cable

Smart jumper



Solar panel 079410

mono crystalline ETFE quality 18V - 100 W max





	USAGETIME		BATTERY Lithium		CONVERTER	IN	PUT					OUTPUTS				SIZES		
								∕ ••••	_		•		•				1	<u> </u>
			Capacity per cell	Full charge		_					MICRO USB		USB				mm	kg
	50 W 100 W 250 W 500 W 1000 W 2200 W	22 h 11 h 4 h 30 2 h 15 1 h 05 30 min	55 Ah 1408 Wh	8 h - 14 h depending on the selected charging mode	Pure Sine Wave	2	12V/30V	12V	2	12V-10A	2	Type C	13	5V-3A 9V-2A 12V-1.5A 5V-2.4 A (33)	3	230 Vac	360 x 270 x 280	17.5